

DESIGN NOTES

Ultralow Quiescent Current DC/DC Converters for Light Load Applications – Design Note 142

Sam Nork

In lightly loaded battery applications that require regulated power supplies, the quiescent current drawn by the DC/DC converter can represent a substantial portion of the average battery current drain. In such applications, minimizing the quiescent current of the DC/DC converter becomes a primary objective because this results in longer battery life and/or an increased power budget for the rest of the circuitry. The following two circuits provide regulated step-up and step-down DC/DC conversion and consume extremely low quiescent current.

2-Cell to 5V Conversion with $I_Q = 12\mu\text{A}$

The circuit in Figure 1 produces a regulated 5V output from a 2V to 5V input and consumes only $12\mu\text{A}$ (typical) of supply current. The LTC[®]1516 is a charge pump DC/DC converter that uses Burst Mode[™] operation to provide a regulated 5V output.

This circuit achieves ultralow quiescent current by disabling the internal charge pump when the output is in regulation. The charge pump is enabled only when the output load forces the voltage on C_{OUT} to droop by approximately 80mV. External capacitors C1 and C2 are then used to transfer charge from V_{IN} to V_{OUT} until the output climbs back into regulation. This regulation method results in approximately 100mV of voltage ripple at the output.

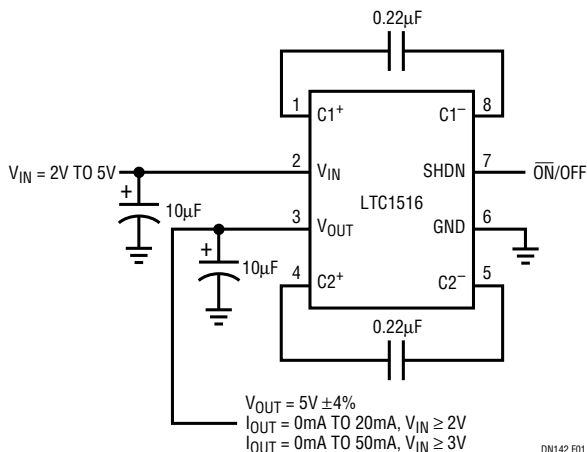


Figure 1. Regulated 5V Output from a 2V to 5V Input

The circuit is capable of providing up to 50mA of output current (for $V_{IN} \geq 3\text{V}$). As shown in Figure 2, typical efficiency exceeds 70% with load currents as low as 50µA.

The low quiescent current of the LTC1516 may render shutdown of the 5V supply unnecessary because the $12\mu\text{A}$ quiescent current is lower than the self-discharge rate of many batteries. However, the part is also equipped with a $1\mu\text{A}$ shutdown mode for additional power savings.

Ultralow Quiescent Current ($I_Q < 5\mu\text{A}$)

Regulated Supply

The LTC1516 contains an internal resistor divider that draws only $1.5\mu\text{A}$ (typ) from V_{OUT} . During no-load conditions, the internal load causes a droop rate of only 150mV per second on V_{OUT} with $C_{OUT} = 10\mu\text{F}$. Applying a 5Hz to

LT, LTC and LT are registered trademarks of Linear Technology Corporation. Burst Mode is a trademark of Linear Technology Corporation.

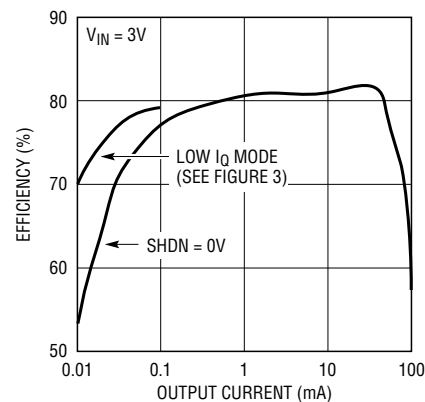


Figure 2. Efficiency vs Output Current

SHDN PIN WAVEFORMS:

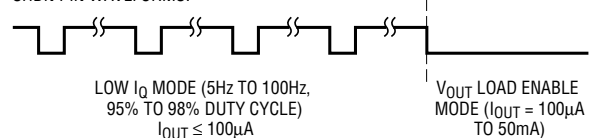


Figure 3. SHDN Pin Waveforms for Ultralow Quiescent Current Supply

The LTC1516 must be out of shutdown for a minimum duration of 200 μ s to allow enough time to sense the output and keep it in regulation. As the V_{OUT} load current increases, the frequency with which the part is taken out of shutdown must also be increased to prevent V_{OUT} from drooping below 4.8V during the OFF phase. A 100Hz 98% duty cycle signal on the SHDN pin ensures proper regulation with load currents as high as 100 μ A. When load current greater than 100 μ A is needed, the SHDN pin must be forced low, as in normal operation. The typical no-load supply current for this circuit with $V_{IN} = 3V$ is only 3.2 μ A.

