


# DESIGN NOTES


Jim Williams

This device permits fast circuit functions that are difficult or impractical using other approaches. Two applications are presented here.

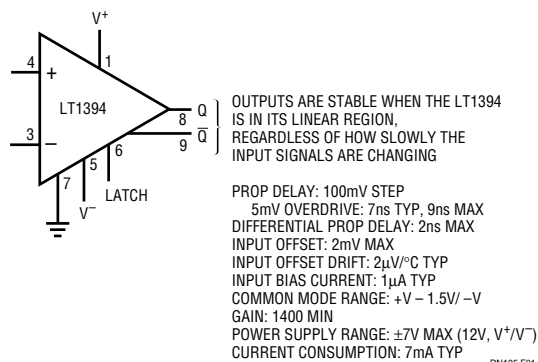


## Figure 1. The LT1394 at a Glance

 LTC and LT are registered trademarks of Linear Technology Corporation.

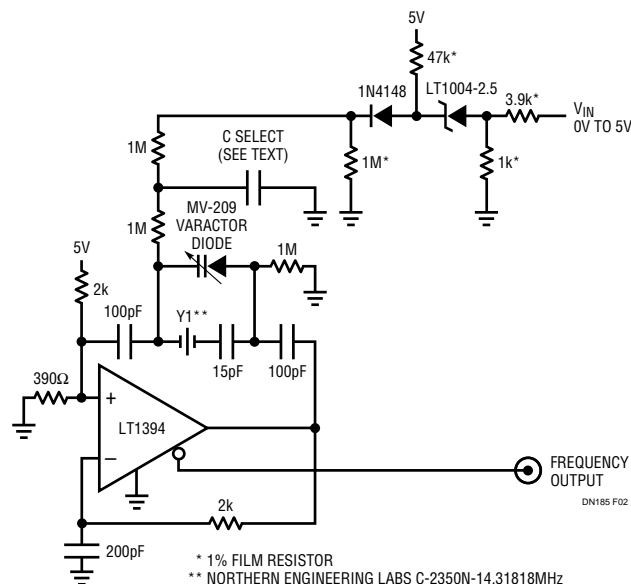

**Figure 2. A 4× NTSC Subcarrier Voltage-Tunable Crystal Oscillator. Tuning Range and Bandwidth Accommodate a Variety of Phase Locked Loops**

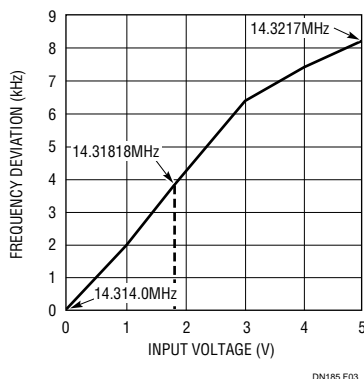

**Figure 3. Control Voltage vs Output Frequency for Figure 2. Tuning Deviation from Center Frequency Exceeds  $\pm 240$ ppm**


### High Speed Adaptive Trigger Circuit

Line and fiber-optic receivers often require an adaptive trigger to compensate for variations in signal amplitude and DC offsets. The circuit in Figure 4 triggers on 2mV to 175mV signals from 100Hz to 45MHz while operating from a single 5V rail. A1, operating at a gain of 15, provides wideband AC gain. The output of this stage biases a 2-way peak detector (Q1 through Q4). The maximum peak is stored in Q2's emitter capacitor, while the minimum excursion is retained in Q4's emitter capacitor. The DC value of the midpoint of A1's output signal appears at the junction of the 500pF capacitor and the 3M $\Omega$  units. This point always sits midway between the signal's excursions, regardless of absolute amplitude. This signal-adaptive


voltage is buffered by A2 to set the trigger voltage at the LT1394's positive input. The LT1394's negative input is biased directly from A1's output. The LT1394's output, the circuit's output, is unaffected by  $>85:1$  signal amplitude variations. Bandwidth limiting in A1 does not affect triggering because the adaptive trigger threshold varies ratiometrically to maintain circuit output.

Figure 5 shows operating waveforms at 40MHz. Trace A's input produces Trace B's amplified output at A1. The comparator's output is Trace C.

Additional applications and a tutorial on high speed comparator circuitry can be found in Application Note 72, "A Seven Nanosecond Comparator for Single-Supply Operation."

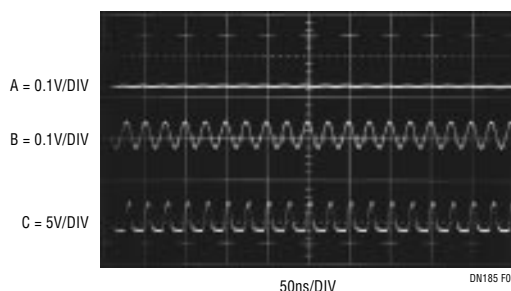

**Figure 5. Adaptive Trigger Responding to a 40MHz, 5mV Input. Input Amplitude Variations from 2mV to 175mV are Accommodated**

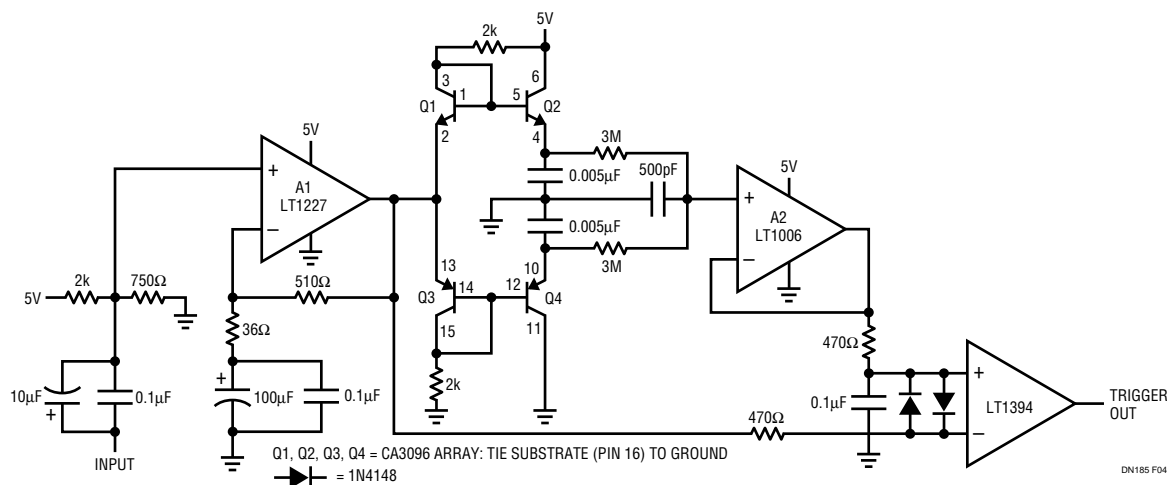

**Figure 4. 45MHz Single-Supply Adaptive Trigger. Output Comparator's Threshold Varies Ratiometrically with Input Amplitude, Maintaining Data Integrity over  $>85:1$  Input Amplitude Range**

For literature on our High Speed Comparators, call **1-800-4-LINEAR**. For applications help, call (408) 432-1900, Ext. 2456