

Dual, Matched Precision Operational Amplifier

FEATURES

- **Guaranteed low offset voltage**

LT1002A	60 μ V max
LT1002	100 μ V max
- **Guaranteed offset voltage match**

LT1002A	40 μ V max
LT1002	80 μ V max
- **Guaranteed low drift**

LT1002A	0.9 μ V/ $^{\circ}$ C max
LT1002	1.3 μ V/ $^{\circ}$ C max
- **Guaranteed CMRR**

LT1002A	110dB min
LT1002	110dB min
- **Guaranteed channel separation**

LT1002A	132dB min
LT1002	130dB min
- **Guaranteed matching characteristics**
- **Low noise 0.35 μ V p-p**

APPLICATIONS

- Thermocouple Amplifiers
- Strain Gauge Amplifiers
- Low level signal processing
- Medical instrumentation
- Precision dual limit threshold detection
- Instrumentation amplifiers

DESCRIPTION


The LT1002 dual, matched precision operational amplifiers combine excellent individual amplifier performance with tight matching and temperature tracking between amplifiers.

In the design, processing, and testing of the device, particular attention has been paid to the optimization of the entire distribution of several key parameters and their matching. Consequently, the specifications of even the low cost commercial grade (the LT1002C) have been spectacularly improved compared to presently available devices.


Essentially, the input offset voltage of all units is less than $80\mu\text{V}$, and matching between amplifiers is consistently better than $60\mu\text{V}$ (see distribution plot below). Input bias and offset currents, channel separation, common mode and power supply rejections of the LT1002C are all specified at levels which were previously attainable only on very expensive, selected grades of other dual devices. Power dissipation is nearly halved compared to the most popular precision duals, without adversely affecting noise or speed performance. A by-product of lower dissipation is decreased warm-up drift. For even better performance in a single precision op amp, refer to the LT1001 data sheet. A bridge signal conditioning application is shown below. This circuit illustrates the requirement for both excellent matching and individual amplifier specifications.

2

Strain Gauge Signal Conditioner With Bridge Excitation

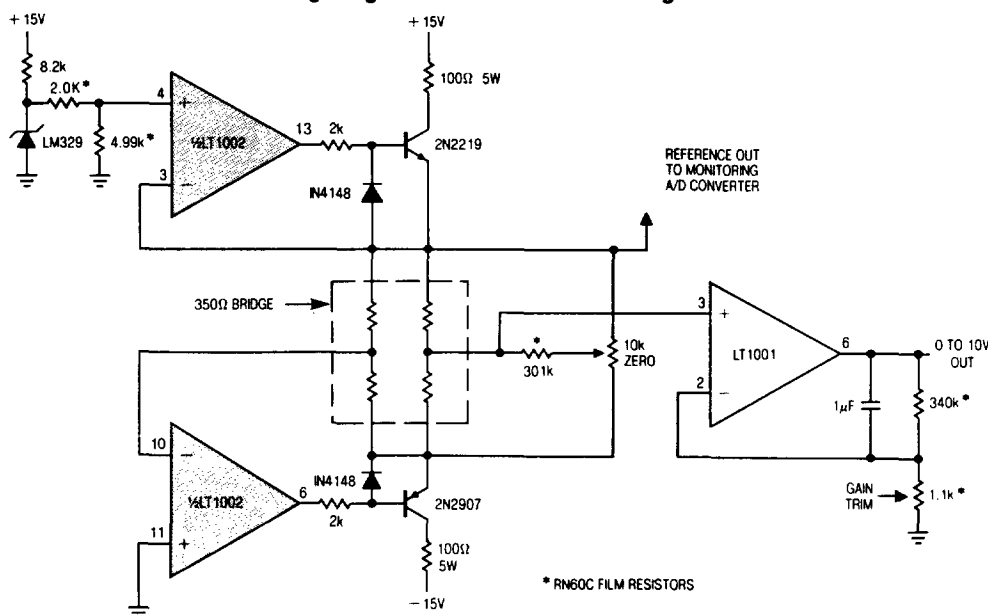

Distribution of Offset Voltage Match

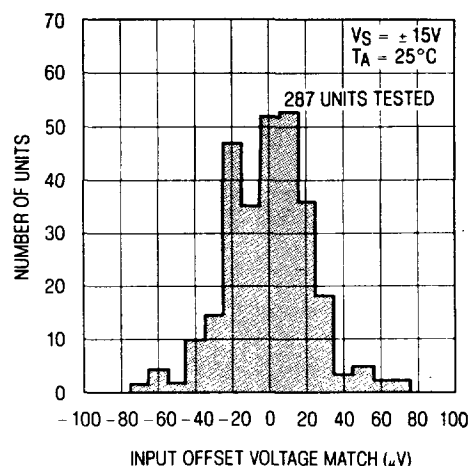

ABSOLUTE MAXIMUM RATINGS

Supply Voltage (Note 6)	$\pm 22V$
Differential Input Voltage	$\pm 30V$
Input Voltage Equal to Supply Voltage	
Output Short Circuit Duration	Indefinite
Operating Temperature Range	
LT1002AM/LT1002M	$-55^{\circ}C$ to $125^{\circ}C$
LT1002AC/LT1002C	$0^{\circ}C$ to $70^{\circ}C$
Storage Temperature Range	
All Grades	$-65^{\circ}C$ to $150^{\circ}C$
Lead Temperature (Soldering, 10 sec.)	$300^{\circ}C$

PACKAGE/ORDER INFORMATION

TOP VIEW		ORDER PART NO.	OFFSET VOLTAGE MAX at 25°C
J PACKAGE 14 PIN HERMETIC	N PACKAGE 14 PIN PLASTIC	LT1002AMJ LT1002MJ LT1002ACJ LT1002CJ LT1002ACN LT1002CN	60μV 100μV 60μV 100μV 60μV 100μV
NOTE: Device may be operated even if insertion is reversed; this is due to inherent symmetry of pin locations of amplifiers A and B. (Note 6)			

ELECTRICAL CHARACTERISTICS, INDIVIDUAL AMPLIFIERS

$V_S = \pm 15V$, $T_A = 25^{\circ}C$, unless otherwise noted

SYMBOL	PARAMETER	CONDITIONS	LT1002AM/LT1002AC			LT1002M/LT1002C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	Note 1		20	60		25	100	μV
$\frac{\Delta V_{OS}}{\Delta \text{Time}}$	Long Term Input Offset Voltage Stability	Notes 2 and 3		0.3	1.5		0.4	2.0	$\mu V/\text{month}$
I_{OS}	Input Offset Current			0.3	2.8		0.4	4.2	nA
I_B	Input Bias Current			± 0.6	± 3.0		± 0.7	± 4.5	nA
e_n	Input Noise Voltage	0.1Hz to 10Hz (Note 2)		0.35	0.7		0.38	0.75	μV_{p-p}
e_n	Input Noise Voltage Density	$f_o = 10\text{Hz}$ (Note 5) $f_o = 1000\text{Hz}$ (Note 2)		10.3 9.6	20.0 11.5		10.5 9.8	20.0 12.0	$nV/\sqrt{\text{Hz}}$
A_{VOL}	Large Signal Voltage Gain	$R_L \geq 2k\Omega$, $V_o = \pm 12V$ $R_L \geq 1k\Omega$, $V_o = \pm 10V$	400 250	800 500		350 220	800 500		V/mV
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13V$	110	126		110	126		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 3V$ to $\pm 18V$	108	123		105	123		dB
R_{in}	Input Resistance Differential Mode	Note 4	20	100		13	80		M Ω
	Input Voltage Range		± 13	± 14		± 13	± 14		V
V_{OUT}	Maximum Output Voltage Swing	$R_L \geq 2k\Omega$ $R_L \geq 1k\Omega$	± 13 ± 12	± 14 ± 13.5		± 13 ± 12	± 14 ± 13.5		V
SR	Slew Rate	$R_L \geq 2k\Omega$ (Note 4)	0.1	0.25		0.1	0.25		V/ μs
GBW	Gain Bandwidth Product	Note 4	0.4	0.8		0.4	0.8		MHz
P_d	Power Dissipation per amplifier	No load No load, $V_S = \pm 3V$	46 4	75 7		48 4	85 8		mW

ELECTRICAL CHARACTERISTICS, INDIVIDUAL AMPLIFIERS

 $V_S = \pm 15V$, $-55^\circ C \leq T_A \leq 125^\circ C$, unless otherwise noted

SYMBOL	PARAMETER	CONDITIONS		LT1002AM			LT1002M			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	Note 1	●		30	150		45	230	μV
$\frac{\Delta V_{OS}}{\Delta Temp}$	Average Input Offset Voltage Drift		●		0.2	0.9		0.3	1.3	$\mu V/^\circ C$
I_{OS}	Input Offset Current		●		0.8	5.6		1.2	8.5	nA
I_B	Input Bias Current		●		± 1.0	± 6.0		± 1.5	± 9.0	nA
A_{VOL}	Large Signal Voltage Gain	$R_L \geq 2k\Omega$, $V_o = \pm 10V$	●	300	700		200	700		V/mV
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13V$	●	106	122		104	120		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 3V$ to $\pm 18V$	●	102	117		96	117		dB
	Input Voltage Range		●	± 13	± 14		± 13	± 14		V
V_{OUT}	Output Voltage Swing	$R_L \geq 2k\Omega$	●	± 12.5	± 13.5		± 12.0	± 13.5		V
P_d	Power Dissipation per amplifier	No load	●		55	90		60	100	mW

2

 $V_S = \pm 15V$, $0^\circ C \leq T_A \leq 70^\circ C$, unless otherwise noted

SYMBOL	PARAMETER	CONDITIONS		LT1002AC			LT1002C			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	Note 1	●		20	100		30	160	μV
$\frac{\Delta V_{OS}}{\Delta Temp}$	Average Input Offset Voltage Drift		●		0.2	0.9		0.3	1.3	$\mu V/^\circ C$
I_{OS}	Input Offset Current		●		0.5	4.2		0.6	5.7	nA
I_B	Input Bias Current		●		± 0.7	± 4.5		± 1.0	± 6.0	nA
A_{VOL}	Large Signal Voltage Gain	$R_L \geq 2k\Omega$, $V_o = \pm 10V$	●	350	750		250	750		V/mV
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13V$	●	108	124		106	123		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 3V$ to $\pm 18V$	●	105	120		100	120		dB
	Input Voltage Range		●	± 13	± 14		± 13	± 14		V
V_{OUT}	Output Voltage Swing	$R_L \geq 2k\Omega$	●	± 12.5	± 13.8		± 12.5	± 13.8		V
P_d	Power Dissipation per amplifier	No load	●		50	85		55	90	mW

The ● denotes the specifications which apply over the full operating temperature range.

For MIL-STD components, please refer to LTC 883C data sheet for test listing and parameters.

Note 1: Offset voltage measured with high speed test equipment, approximately 1 second after power is applied.

Note 2: This parameter is tested on a sample basis only.

Note 3: Long Term Input Offset Voltage Stability refers to the averaged trend line of V_{OS} versus Time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in V_{OS} during the first 30 operating days are typically $2.5\mu V$.

Note 4: Parameter is guaranteed by design.

Note 5: 10Hz noise voltage density is sample tested on every lot. Devices 100% tested at 10Hz are available on request.

Note 6: The V+ supply terminals are completely independent and may be powered by separate supplies if desired (this approach, however, would sacrifice the advantages of the power supply rejection ratio matching). The V− supply terminals are both connected to the common substrate and must be tied to the same voltage. Both V− pins should be used.

MATCHING CHARACTERISTICS at $V_S = \pm 15V$, $T_A = 25^\circ C$, unless otherwise noted

SYMBOL	PARAMETER	CONDITIONS	LT1002AM/AC			LT1002M/C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
	Input Offset Voltage Match		—	15	40	—	25	80	μV
I_B^+	Average Non-Inverting Bias Current		—	± 0.6	± 3.5	—	± 0.7	± 4.8	nA
I_{OS}^+	Non-Inverting Offset Current		—	0.6	3.5	—	0.7	6.0	nA
I_{OS}^-	Inverting Offset Current		—	0.6	3.5	—	0.7	6.0	nA
$\Delta CMRR$	Common Mode Rejection Ratio Match	$V_{CM} = \pm 13V$	110	132	—	108	132	—	dB
$\Delta PSRR$	Power Supply Rejection Ratio Match	$V_S = \pm 3V$ to $\pm 18V$	108	130	—	102	128	—	dB
	Channel Separation	$f \leq 10Hz$ (Note 4)	132	148	—	130	146	—	dB

MATCHING CHARACTERISTICS at $V_S = \pm 15V$, $-55^\circ C \leq T_A \leq 125^\circ C$, unless otherwise noted


SYMBOL	PARAMETER	CONDITIONS		LT1002AM			LT1002M			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
	Input Offset Voltage Match		●	—	50	140	—	60	230	μV
	Input Offset Voltage Tracking		●	—	0.3	1.0	—	0.4	1.5	$\mu V/^\circ C$
I_B^+	Average Non-Inverting Bias Current		●	—	± 1.5	± 6.0	—	± 1.8	± 10.0	nA
I_{OS}^+	Non-Inverting Offset Current		●	—	1.5	6.5	—	1.8	12.0	nA
I_{OS}^-	Inverting Offset Current		●	—	1.5	6.5	—	1.8	12.0	nA
$\Delta CMRR$	Common Mode Rejection Ratio Match	$V_{CM} = \pm 13V$	●	106	126	—	102	124	—	dB
$\Delta PSRR$	Power Supply Rejection Ratio Match	$V_S = \pm 3V$ to $\pm 18V$	●	102	122	—	94	120	—	dB

MATCHING CHARACTERISTICS at $V_S = \pm 15V$, $0^\circ C \leq T_A \leq 70^\circ C$, unless otherwise noted


SYMBOL	PARAMETER	CONDITIONS		LT1002AC			LT1002C			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
	Input Offset Voltage Match		●	—	30	85	—	45	150	μV
	Input Offset Voltage Tracking		●	—	0.3	1.0	—	0.4	1.5	$\mu V/^\circ C$
I_B^+	Average Non-Inverting Bias Current		●	—	± 1.0	± 4.5	—	± 1.2	± 7.0	nA
I_{OS}^+	Non-Inverting Offset Current		●	—	1.0	5.0	—	1.2	8.5	nA
I_{OS}^-	Inverting Offset Current		●	—	1.0	5.0	—	1.2	8.5	nA
$\Delta CMRR$	Common Mode Rejection Ratio Match	$V_{CM} = \pm 13V$	●	108	130	—	105	128	—	dB
$\Delta PSRR$	Power Supply Rejection Ratio Match	$V_S = \pm 3V$ to $\pm 18V$	●	105	126	—	98	124	—	dB

TYPICAL PERFORMANCE CHARACTERISTICS


Distribution of Offset Voltage of Individual Amplifiers

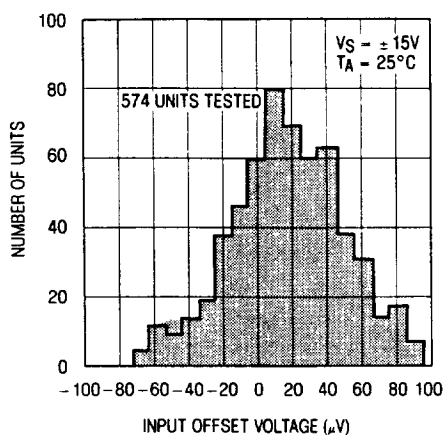


Distribution of Offset Voltage Drift with Temperature (Individual Amplifiers)

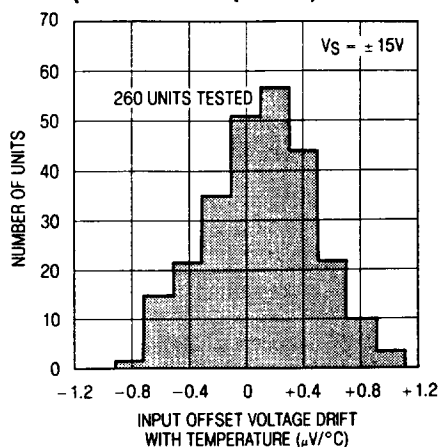


Distribution of Offset Voltage Match Drift with Temperature

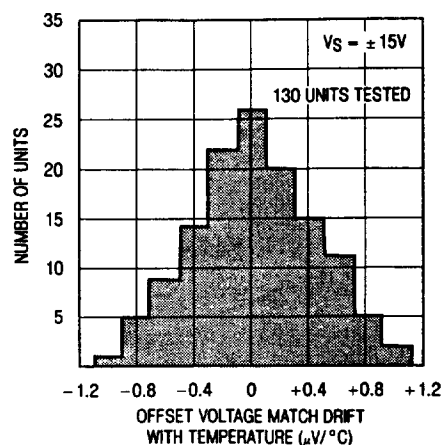


Offset Voltage Drift with Temperature of Six Representative Units

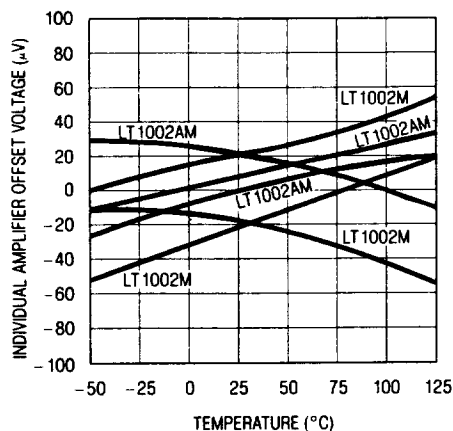


Offset Voltage Tracking with Temperature of Six Representative Units

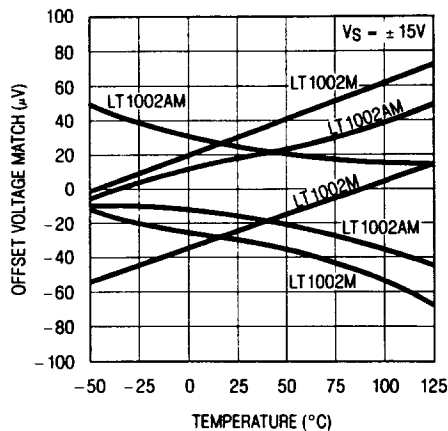


Warm-Up Drift

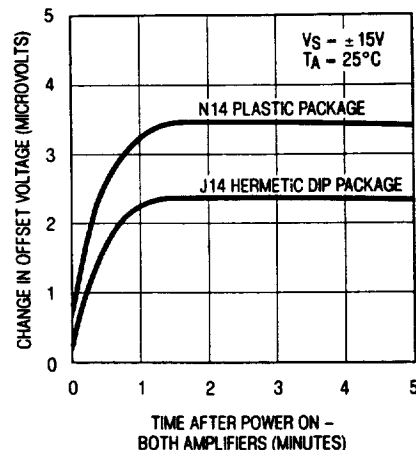


Long Term Stability of Four Representative Units

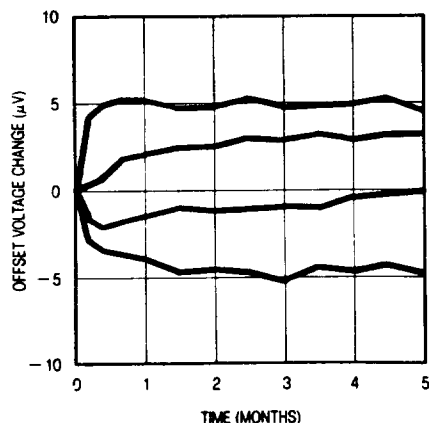

0.1Hz to 10Hz Noise

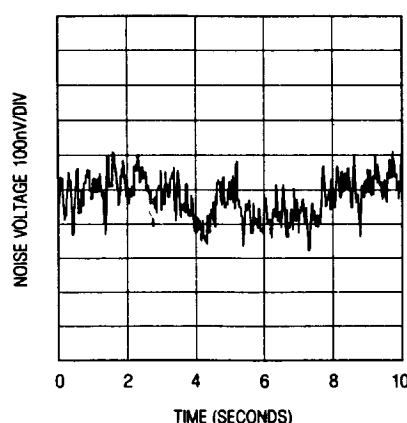


Noise Spectrum

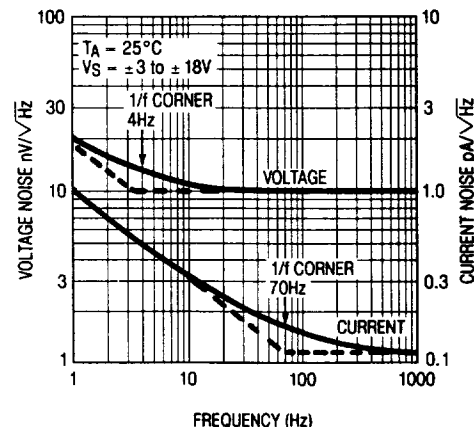


TYPICAL PERFORMANCE CHARACTERISTICS


Matching and Individual Amplifier Bias and Offset Currents vs Temperature

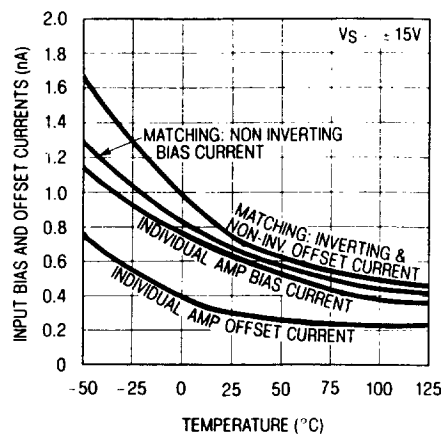


Input Bias Current Over the Common Mode Range

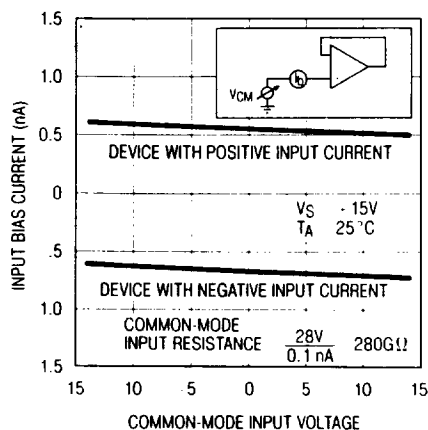


Input Bias Current vs. Differential Input Voltage

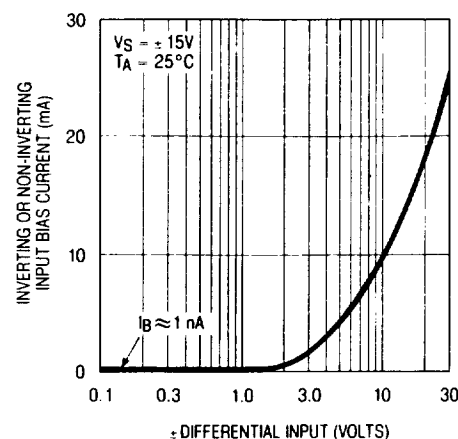


Open Loop Voltage Gain vs Temperature

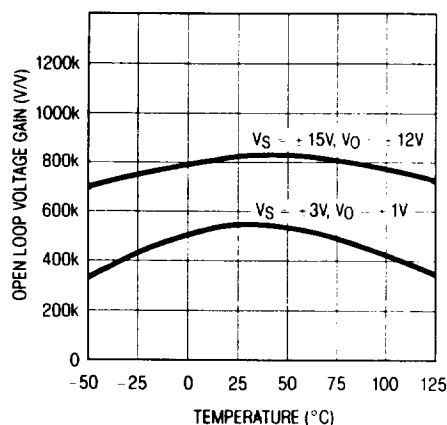


Open Loop Voltage Gain Frequency Response

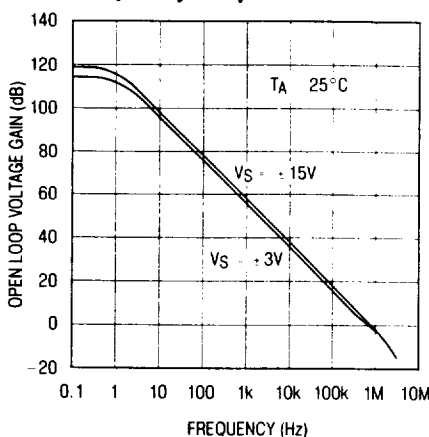


Gain, Phase Shift vs. Frequency

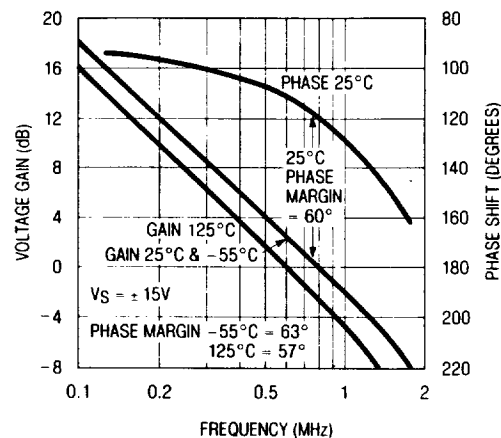


Open Loop Gain Mismatch vs Frequency

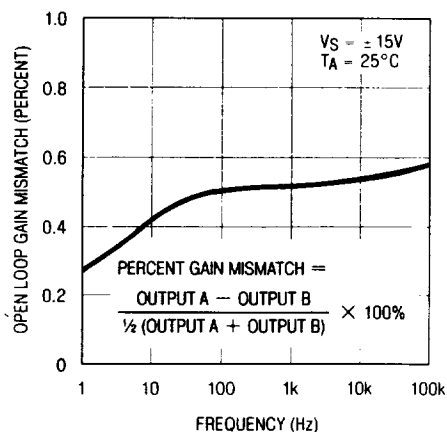

Closed Loop Output Impedance

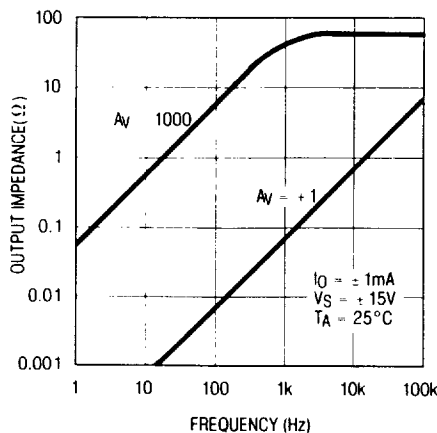


Power Supply Rejection and PSRR Match vs Frequency

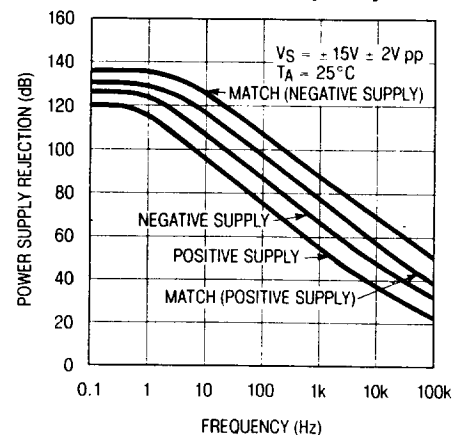


TYPICAL PERFORMANCE CHARACTERISTICS


Channel Separation vs Frequency

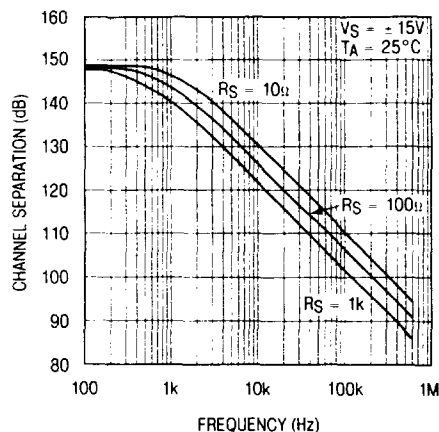

Common Mode Rejection and CMRR Match vs Frequency

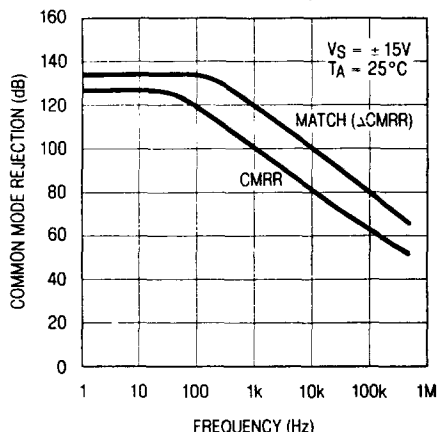


Common Mode Limit vs Temperature

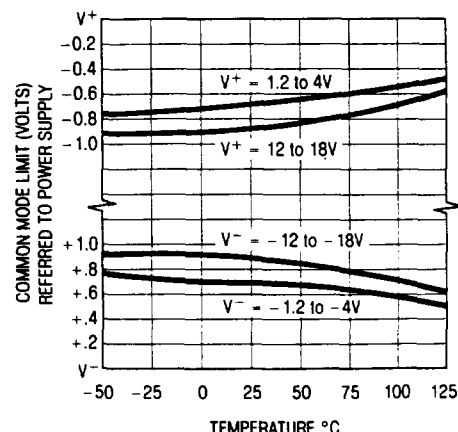


2


Supply Current vs. Supply Voltage For Each Amplifier

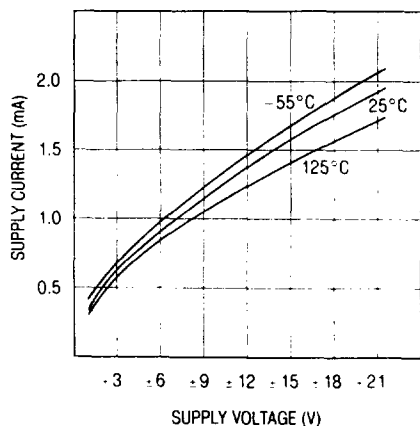


Large Signal Transient Response

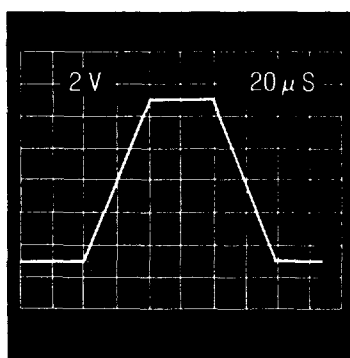

Maximum Undistorted Output vs. Frequency

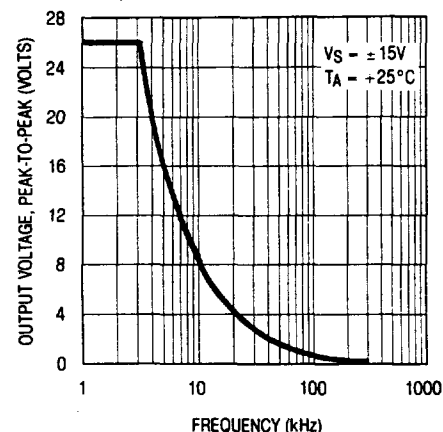


Small Signal Transient Response

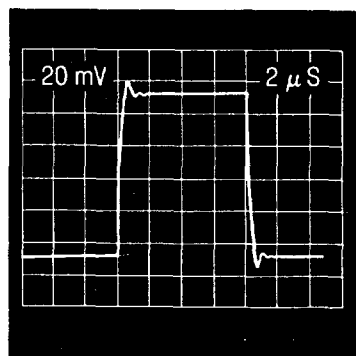


$A_V = +1$, $C_L = 50pF$

Voltage Follower Overshoot vs Capacitive Load


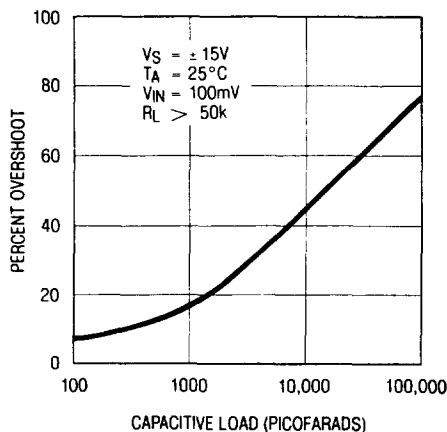


Small Signal Transient Response

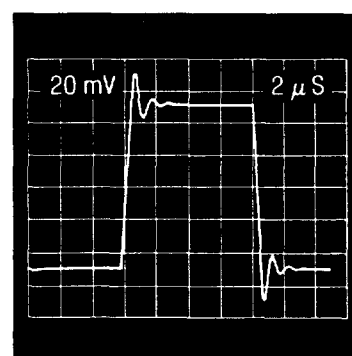

$A_V = +1$, $C_L = 1000pF$

TYPICAL PERFORMANCE CHARACTERISTICS

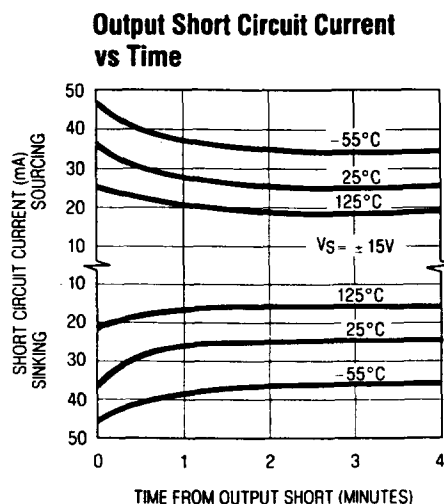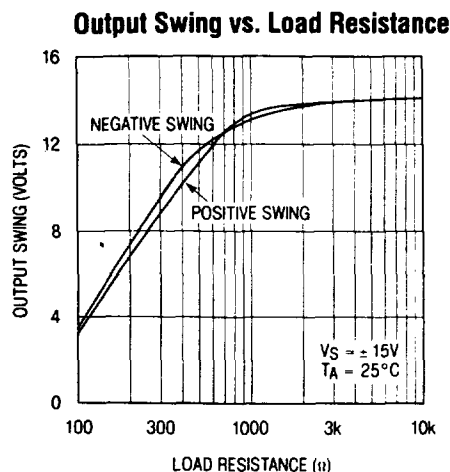

APPLICATIONS INFORMATION


The LT1002 dual amplifier may be inserted directly into OP-10, OP207, OP227 sockets with or without removal of external nulling potentiometers.

Offset Voltage Adjustment The input offset voltage of the LT1002, and its drift with temperature, are permanently trimmed at wafer testing to a low level. However, if further adjustment of V_{OS} is necessary, nulling with a 10k or 20k potentiometer will not degrade drift with temperature. Trimming to a value other than zero creates a drift of $(V_{OS}/300) \mu V/^\circ C$, e.g. if V_{OS} is adjusted to $300 \mu V$, the change in drift will be $1 \mu V/^\circ C$. The adjustment range with a 10k or 20k pot is approximately $\pm 2.5mV$. If less adjustment range is needed, the sensitivity and resolution of the nulling can be improved by using a smaller pot in conjunction with fixed resistors. The example has an approximate null range of $\pm 100 \mu V$.


In matching applications, both amplifiers can be trimmed to zero, or the offset of one amplifier can be trimmed to match the offset of the other. Offset adjustment, however, slightly degrades the gain, common-mode and power-supply rejection match between the

two op amps. Fortunately, the guaranteed offset voltage match of the LT1002 is very low, in most applications offset adjustment will be unnecessary.

Standard Adjustment

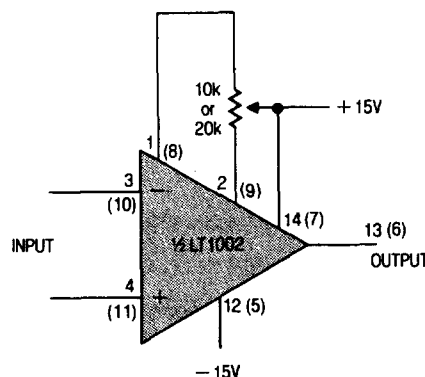


Improved Sensitivity Adjustment

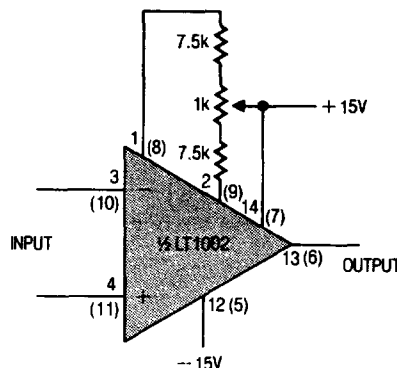

APPLICATIONS INFORMATION

Test Circuit for Offset Voltage and its Drift with Temperature

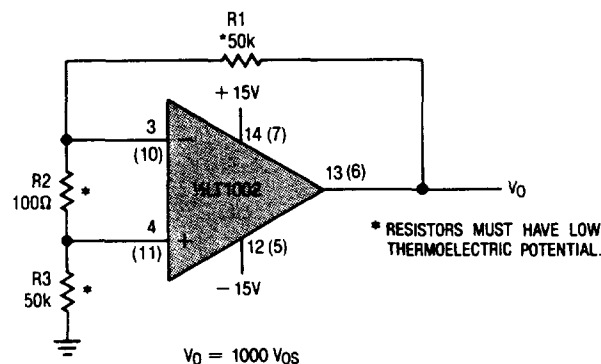

This circuit is also used as the burn-in configuration for the LT1002, with supply voltages increased to $\pm 20V$, $R1 = R3 = 20k$, $R2 = 200\Omega$, $A_V = 100$.

Unless proper care is exercised, thermocouple effects, caused by temperature gradients across dissimilar metals at the contacts to the input terminals, can exceed the inherent drift of the amplifier. Air currents should be minimized, package leads should be short, the two input leads should be as close together as possible and maintained at the same temperature.


Channel Separation

This parameter is defined as the ratio of the change in input offset voltage of one amplifier to the change in output voltage of the other amplifier causing the offset change.

At low frequencies the LT1002's channel separation is an almost unmeasurable 148dB. As frequency increases, pin to pin capacitance of the package, between the output of one amplifier and the inputs of the other, becomes dominant. Since these pins are non-adjacent, the capacitance is only 0.02pF. To maintain the LT1002's excellent channel separation at higher frequencies, the socket and PC board capacitances should be minimized.

0.1Hz to 10Hz Noise Test Circuit

The device under test should be warmed up for three minutes and shielded from air currents. Turn the device 180° to measure the noise of side B.

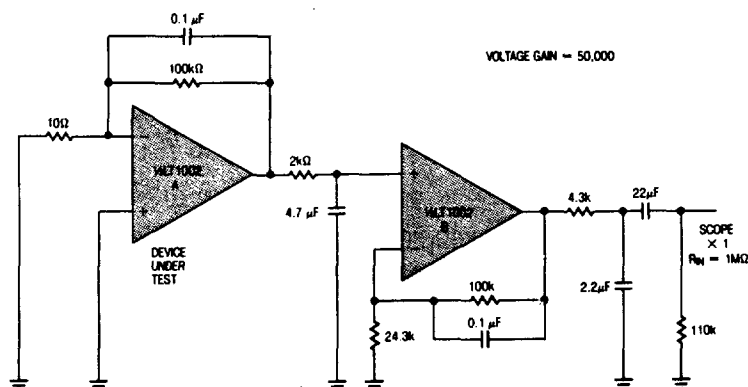

(Peak to Peak noise measured in 10 Sec interval)

Power supplies

The LT1002 is specified over a wide range of power supply voltages from $\pm 3V$ to $\pm 18V$. Operation with lower supplies is possible, down to $\pm 1.2V$ (two Ni-Cad batteries). However, with $\pm 1.2V$ supplies, the device is stable only in closed loop gains of +2 or higher (or inverting gain of one or higher).

The $V+$ supply terminals are completely independent and may be powered by separate supplies if desired (this approach, however, would sacrifice the advantages of the power supply rejection ratio matching). The $V-$ supply terminals are both connected to the common substrate and must be tied to the same voltage. Both $V-$ pins should be used.

APPLICATIONS INFORMATION

Advantages of Matched Dual Op Amps In many applications the performance of a system depends on the matching between two operational amplifiers rather than the individual characteristics of the two op amps. Two or three op amp instrumentation amplifiers, tracking voltage references and low drift active filters are some of the circuits requiring matching between two op amps.


The well-known triple op amp configuration illustrates these concepts. Output offset is a function of the difference between the offsets of the two halves of the LT1002. This error cancellation principle holds for a considerable number of input referred parameters in addition to offset voltage and its drift with temperature. Input bias current will be the average of the two non-inverting input currents (I_B^+). The difference between these two currents (I_{OS}^+) is the offset current of the instrumentation amplifier. The difference between the inverting input currents (I_{OS}^-) will cause errors flowing through R1, R2, and R3. Common-mode and power supply rejections will be dependent only on the match between the two amplifiers (assuming perfect resistor matching).

The concepts of common mode and power supply rejection ratio match ($\Delta CMRR$ and $\Delta PSRR$) are best demonstrated with a numerical example:

Assume $CMRR_A = +1.0\mu V/V$ or 120dB,
and $CMRR_B = +0.75\mu V/V$ or 122.5dB,
then $\Delta CMRR = 0.25\mu V/V$ or 132dB;
if $CMRR_B = -0.75\mu V/V$ which is still 122.5dB,
then $\Delta CMRR = 1.75\mu V/V$ or 115dB.

Clearly, the LT1002, by specifying and guaranteeing all of these matching parameters, can significantly improve the performance of matching dependent circuits.

Three Op Amp Instrumentation Amplifier

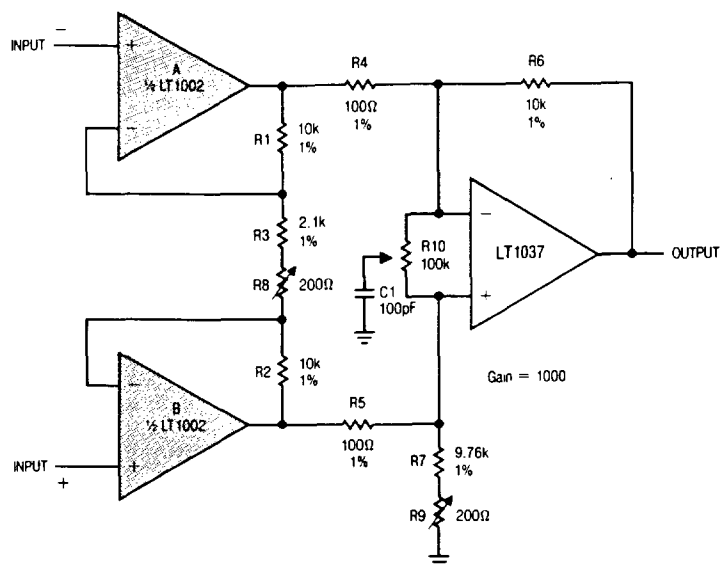

Trim R8 for gain

Trim R9 for DC common mode rejection

Trim R10 for AC common mode rejection

Typical performance of the instrumentation amplifier:

Input offset voltage = $25\mu V$

Input bias current = $0.7nA$

Input resistance = $200 G\Omega$


Input offset current = $0.6nA$

Input noise = $0.5\mu V$ p-p

Power bandwidth ($V_0 = \pm 10V$) = 80kHz

APPLICATIONS INFORMATION

Precision $\pm 10V$ Reference

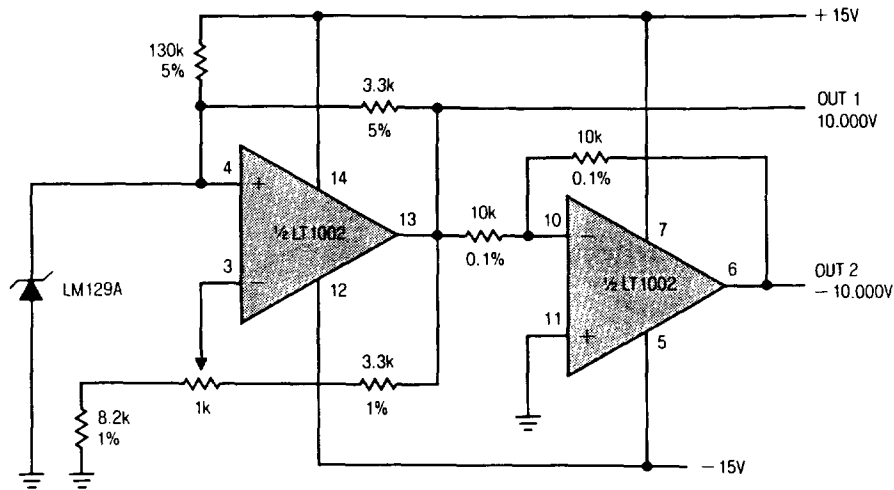


2

The LT1002 contributes less than 5% of the total drift with temperature, noise and long term drift of the ref-

erence. The accuracy of the $-10V$ output is limited by the matching of the two $10k$ resistors.

Dual Limit Microvolt Comparator

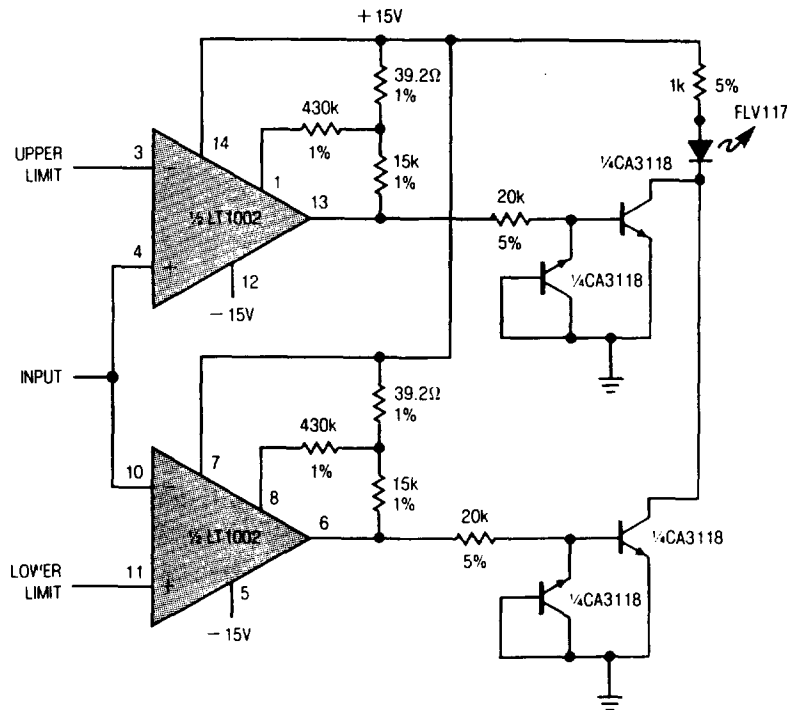


When the upper or lower limit is exceeded the LED lights up. Positive feedback to one of the nulling terminals creates 5 to $20\mu V$ of hysteresis on both amplifiers. This feedback changes the offset voltage of the

LT1002 by less than $5\mu V$. Therefore, the basic accuracy of the comparator is limited only by the low offset voltage of the LT1002.

APPLICATIONS INFORMATION


Two Op Amp Instrumentation Amplifier

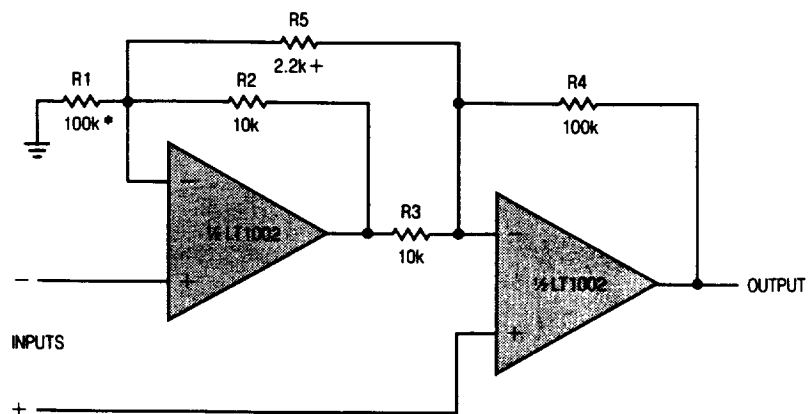

* TRIM FOR COMMON-MODE REJECTION
+ TRIM FOR GAIN

$$\text{Gain} = \frac{R_4}{R_3} \left[1 + \frac{1}{2} \left(\frac{R_2}{R_1} + \frac{R_3}{R_4} \right) + \frac{R_2 + R_3}{R_5} \right] \approx 100$$


Precision Amplifier Drives 500Ω Load to ±10V

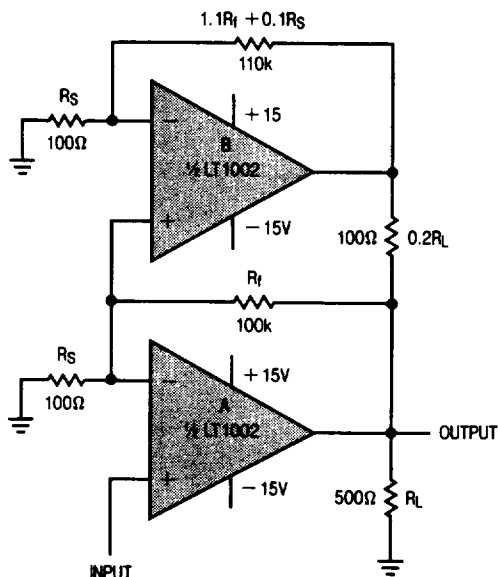


PNL nrg This application utilizes the guaranteed 10mA load driving capability of the LT1002. The offset voltage of amplifier A is the offset of the configuration. Amplifier B provides the additional 10mA load current. When load resistor R_L is removed, amplifier A sinks this current without affecting accuracy. In the gain of 1000 configuration shown, approximately 0.3% gain accuracy can be realized.

APPLICATIONS INFORMATION

Dead Zone Generator

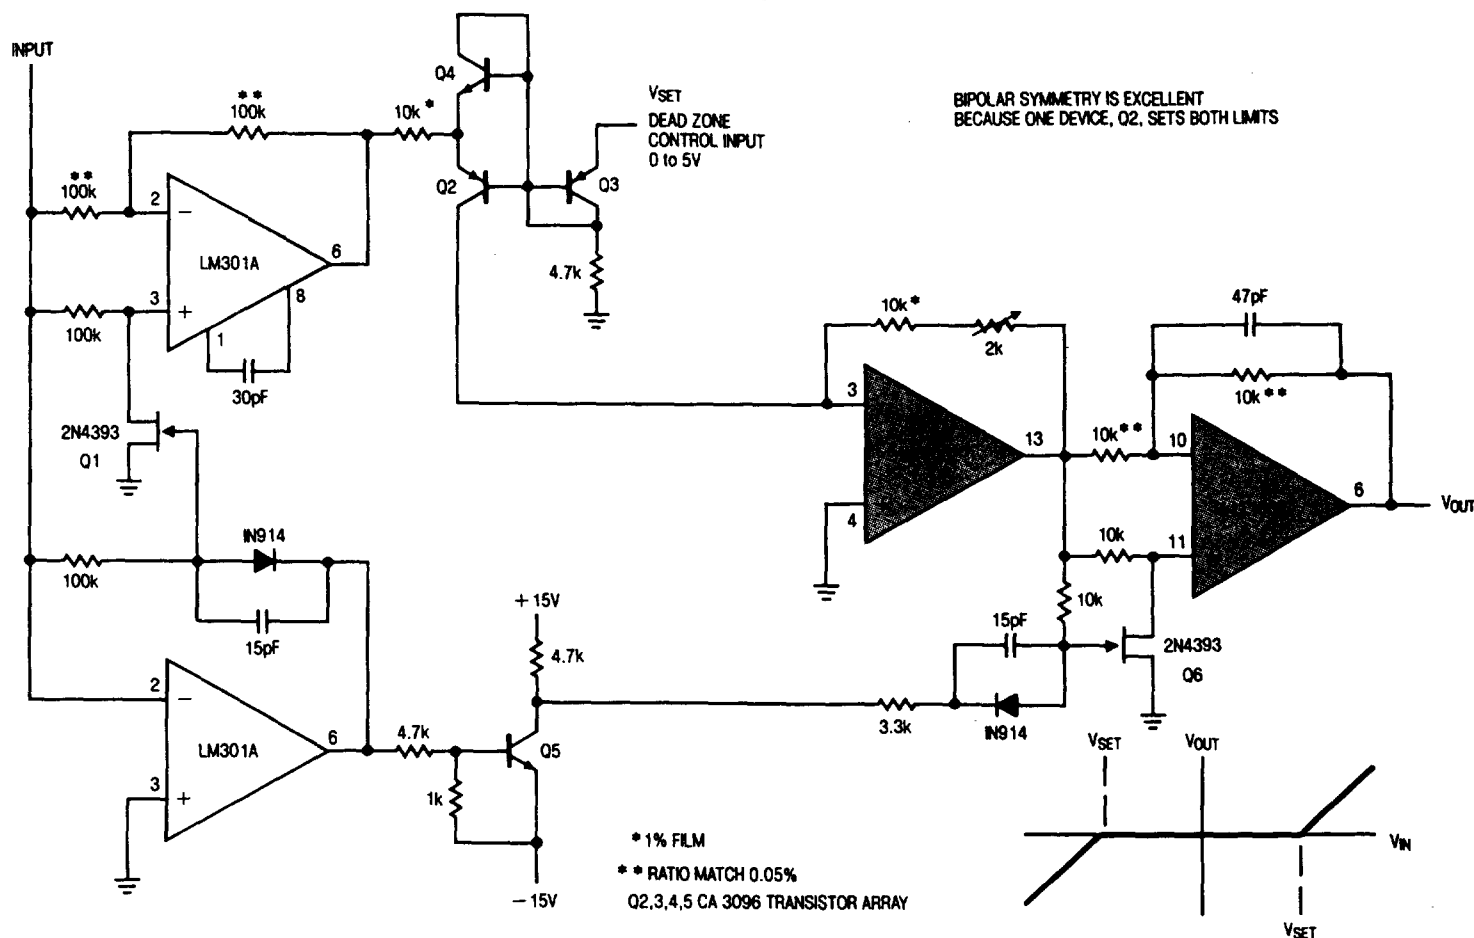


Precision Absolute Value Circuit

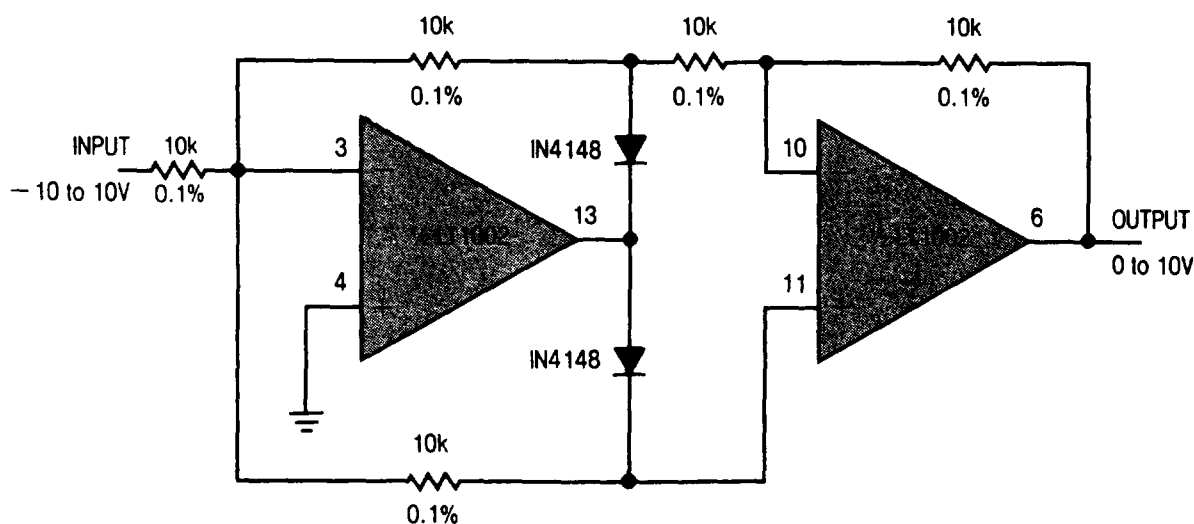


APPLICATIONS INFORMATION

Dual Precision Power Supply (1) 0 to 10V in 100 μ V Steps (2) 0 to 100V in 1mV Steps

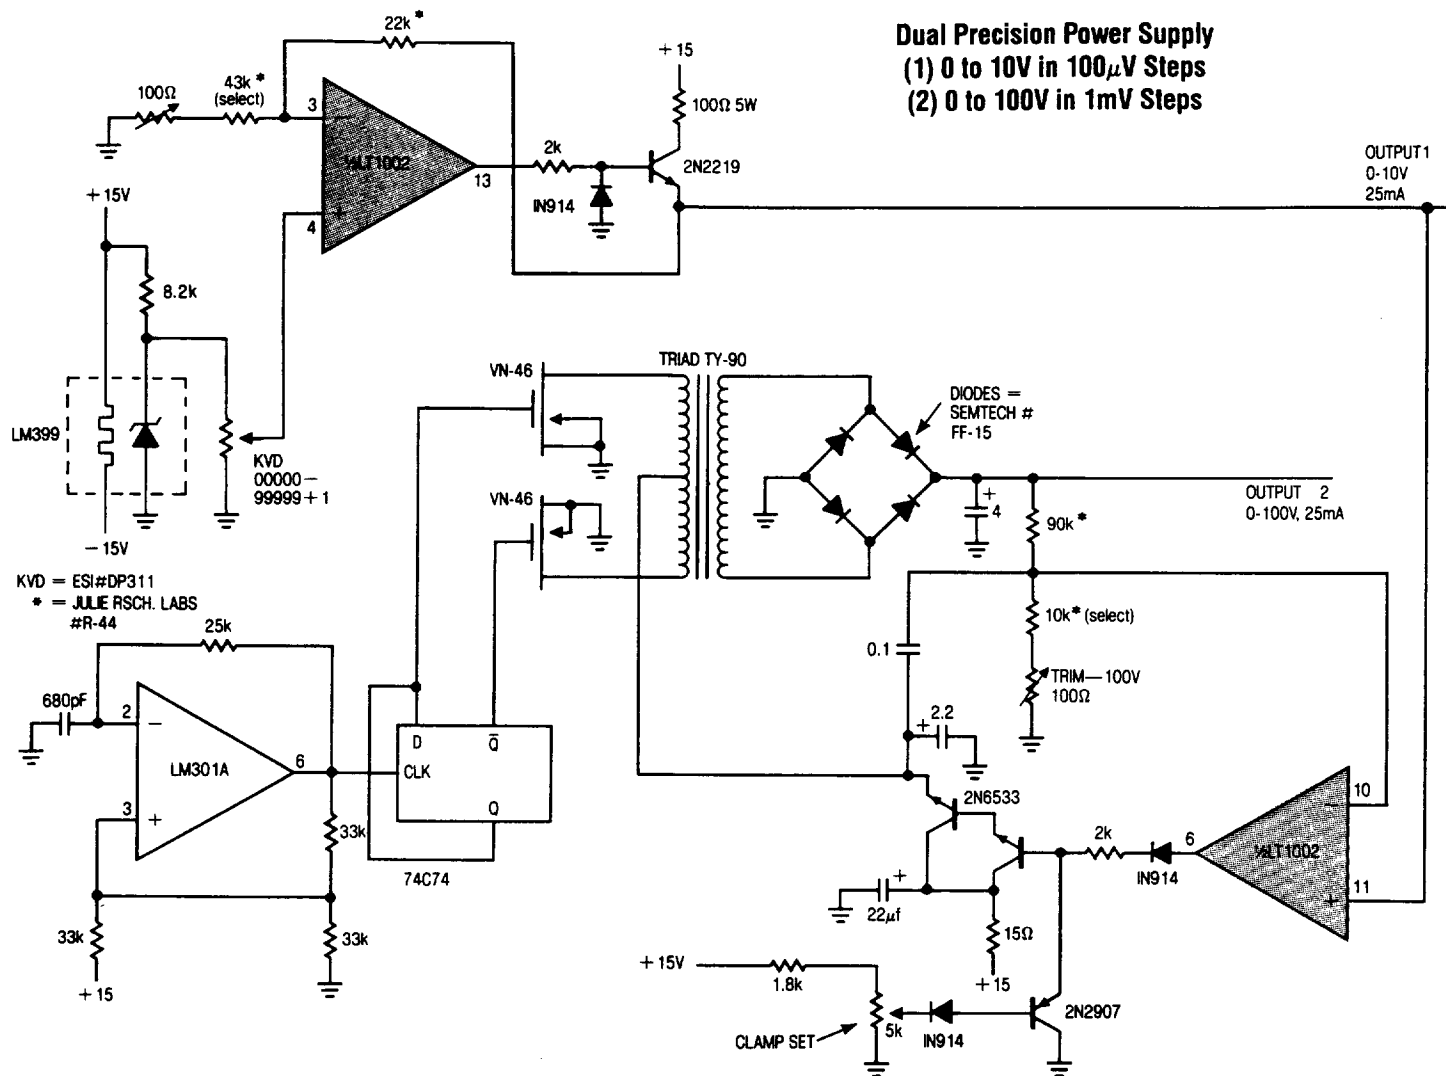

SCHEMATIC DIAGRAM

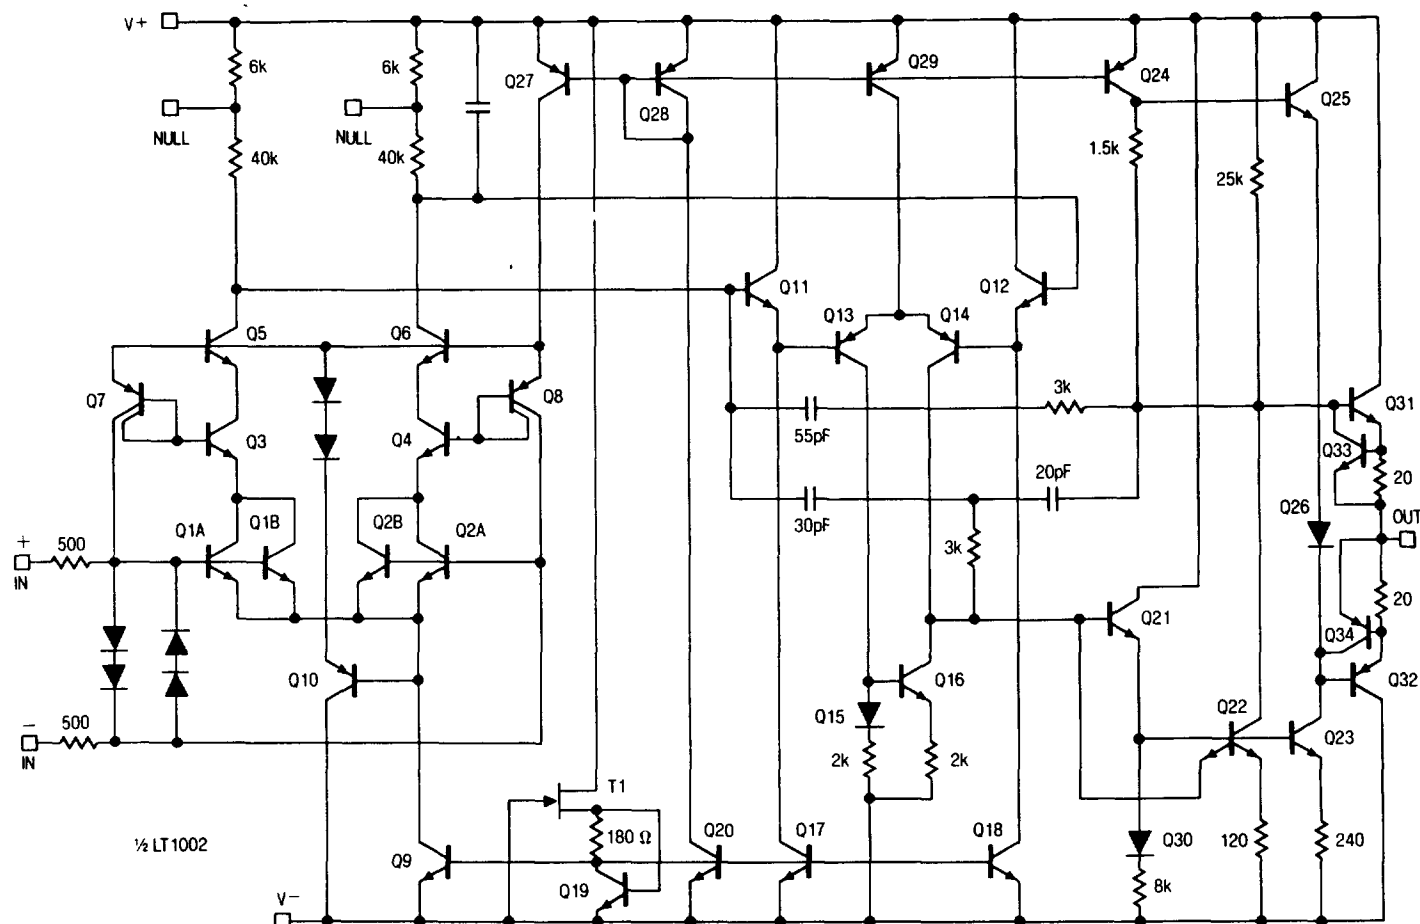


2

PACKAGE DESCRIPTION


Dimensions in inches (millimeters) unless otherwise noted.

14-Lead Molded DIP (N)

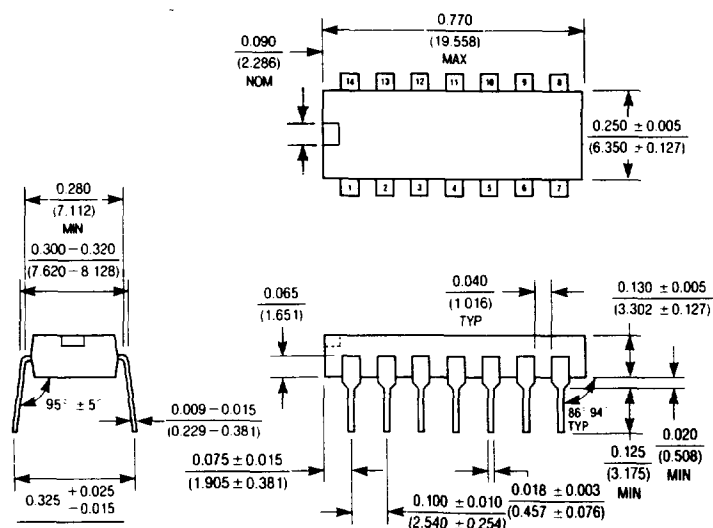

	T _J MAX	θ _{JA}
LT1002ACN LT1002CN	125°C	100°C/W

14-Lead Cavity DIP (J)

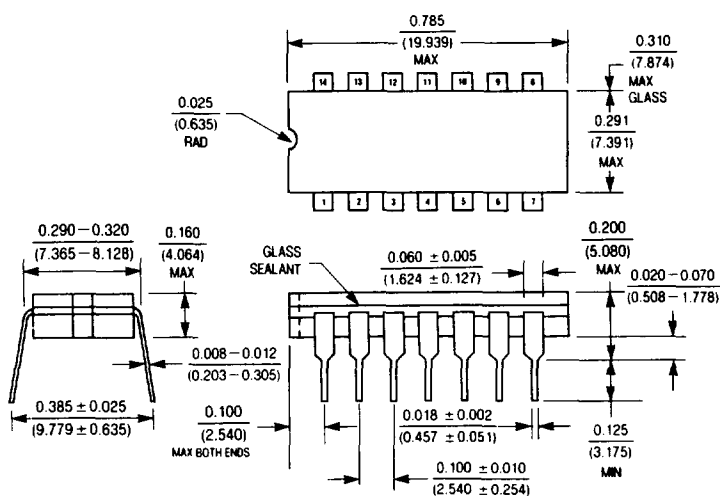

	T _J MAX	θ _{JA}
LT1002ACJ LT1002CJ	125°C	100°C/W
LT1002AMJ LT1002MJ	150°C	100°C/W