

The specifications for the **LT[®]1170IQ** are indicated in **bold** below. All other specifications remain unchanged. For complete specifications, typical performance curves and applications information, please see the **LT1170/LT1171/LT1172** data sheet.

LT, LTC and LT are registered trademarks of Linear Technology Corporation.

ABSOLUTE MAXIMUM RATINGS

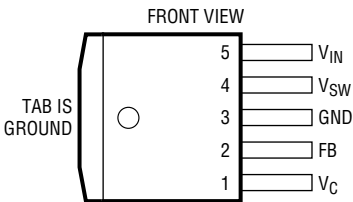
Operating Junction Temperature Range

LT1170IQ (Oper.) **-40°C to 100°C**

LT1170IQ (Sht. Ckt.) **-40°C to 125°C**

(See 1994 Databook)

PACKAGE/ORDER INFORMATION

<p>FRONT VIEW</p>  <p>Q PACKAGE 5-LEAD PLASTIC DD</p> <p>$T_{JMAX} = 100^{\circ}\text{C}$, $\theta_{JA} = ^{\circ}\text{C/W}$</p> <p>*$\theta$ will vary from approximately 25°C/W with 2.8 sq. in. of 1oz. copper to 45°C/W with 0.20 sq. in. of 1oz. copper. Somewhat lower values can be obtained with additional copper layers in multilayer boards.</p>	<p>ORDER PART NUMBER</p> <p>LT1170CQ LT1170IQ LT1171CQ LT1172CQ</p>
--	--

For further information regarding this specification notice contact:

Linear Technology Corporation
 1630 McCarthy Blvd.
 Milpitas, California 95035-7417
 Attn: Product Marketing Manager
 Phone: (408) 432-1900