

*TMS320 DSP
DESIGNER'S NOTEBOOK*

Interfacing Two Analog Interface Circuits to One TMS320C5x Serial Port

APPLICATION BRIEF: SPRA268

*Manuel Rodrigues
Digital Signal Processing Products
Semiconductor Group*

*Texas Instruments
May 1996*



IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain application using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.

TRADEMARKS

TI is a trademark of Texas Instruments Incorporated.

Other brands and names are the property of their respective owners.

CONTACT INFORMATION

US TMS320 HOTLINE	(281) 274-2320
US TMS320 FAX	(281) 274-2324
US TMS320 BBS	(281) 274-2323
US TMS320 email	dsph@ti.com

Contents

Abstract	7
Design Problem.....	8
Solution.....	8

Figures

Figure 1. Connecting Two AICs to One TMS320C5x Serial Port	9
Figure 2. Example of Code.....	10

Interfacing Two Analog Interface Circuits to One TMS320C5x Serial Port

Abstract

In some cases, such as wireless communications applications, a system requires two communication channels but only one serial port is available. This document shows how to multiplex this port and how to interface two analog lines. There is a schematic, and an example of code is given. The analog interface circuits (AICs) chosen for this solution were purposely selected to address as many potential problems as possible.



Design Problem

How can I integrate two analog lines when I only have one serial port?

Solution

In some cases, like wireless communications applications, a system requires two communication channels but only one serial port is available. Figure 1 shows how to multiplex this port and how to interface two analog lines, while an example of code is given in Figure 2. The analog interface circuits (AICs) chosen for this solution were purposely selected to address as many potential problems as possible.

The first AIC, a TLC320AC02 that we will call AIC A, has 14-bit linear resolution and audio frequency with integral anti-aliasing and reconstruction filters. It is designed for easy connection to many DSP chips and is appropriate for a wide variety of applications.

The second AIC, a TCM320AC46 that we will call AIC B, is a 13-bit linear resolution Voice Band Audio Processor (VBAP) with transmit and receive filtering. It is also designed for many general-purpose applications.

Data Transmission on the Serial Port


The DSP's serial port, which runs in burst mode, consists of three types of signals: the clock (CLK), which imposes the pace of the bit sequence and equals the bit rate of the communication; the frame synchro (FS), which indicates the beginning of a bit sequence, on a negative slope, to the other device; and finally, the data line (D), which conveys the bits.

The bit rate and the FS signal are imposed by the active AIC in both emission and reception, and the same FS simultaneously triggers one reception and one emission. Data is transmitted and loaded most significant bit first and is right justified.

The TLC320AC02 (AIC A)

The TMS320AC02 works in variable data rate transmission and is driven by a master clock (MCLK), which is divided by 4 to provide the shift clock (SCLK). It contains programmable counters with internal registers to adjust the sample frequency, the FS frequency, and filter parameters. The TMS320AC02 also has a power-down pin for sleep mode, saving the internal programmed states. In this example, it is used in stand-alone mode, but it also has a master-slave and a codec mode.

Figure 1. Connecting Two AICs to One TMS320C5x Serial Port

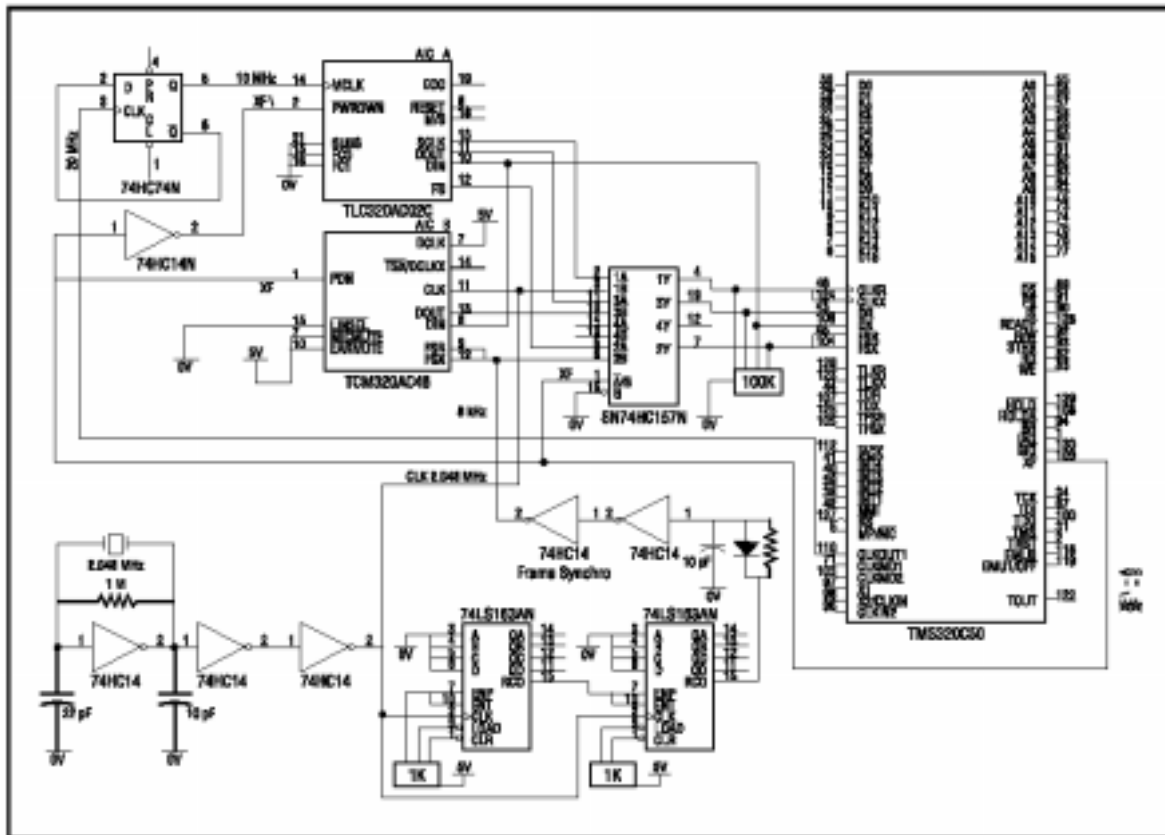

The TCM320AC46 (AIC B)

The TMS320AC46 operates in fixed data rate transmission and the CLK and FS is generated externally. The clock frequency should be 2.048 MHz and the FS should be 8 kHz. In this example, it performs a linear conversion, but it can also perform μ law companded conversion. Also, a power-down pin can be used as a chip select.

Schematic Details

The AIC B clock is generated with 2.048-MHz quartz. The AIC B FS is generated by dividing the clock by 256 due to two 4-bit counters in succession. The 74LS163 counters have a Ripple-Carry-Output (RCO) pin that provides a pulse every 256th clock period. Another solution is to use a single 8-bit 74LS590 counter that also has an RCO pin. Then FS is filtered through an RC circuit and two trigger inverters in order to eliminate parasitic spikes.



The schematic contains six inverters, two of which have to be Schmidt triggers that come from the same 74HC14 package. The AIC A has a maximum MCLK frequency of 15 MHz. It is highly recommended that AIC A and the DSP be clocked from a common master crystal. However, depending on which speed grade is used, the DSP's CLKOUT frequency can be 20 or 40 MHz. So, CLKOUT has to be divided by one or two stages of the 74HC74 flip-flops. Here, CLKOUT frequency is 20 MHz, and is divided by two, giving a 10-MHz MCLK. The chip selection for AIC A and AIC B is done by the external flag (XF) signal coming from the DSP. The XF value is fixed by the XF bit in the DSP's status register, ST1. Both AICs are then set to alternate so when one is on, the other is powered down.

The 74LS157, an 8-to-4 multiplexor, drives the signal coming from the selected AIC to the DSP. CLK, FS, and DR signals then pass through the MUX. DX is an output of the DSP, and is wired directly to the AIC's data-in (DIN) pins.

Software Explanation

Both AICs are driven by the XF bit in the status register, ST1. Therefore, AIC selection is made by setting or clearing this bit. Notice that the XF bit is not pushed by the interrupt context save, so pay special attention when changing the XF value.

At the beginning of the program, some specific initializations will be made concerning the AICs. Indeed, AIC A provides internal registers useful to select sampling frequency or others parameters like input and output gains, or synchro between master and slave devices. A normal communication (16-bit frame) occurs every sample, but in order to read or write into internal registers, a second communication happens between each normal frame. Two external pins, FC0 and FC1, are used in addition with the two LSBs of the primary frame to force this second communication. When FC0 and FC1 are tied low, the secondary frame is forced only by setting the two LSBs to one logical.

Finally, do not request an untimely secondary frame. To prevent this, a mask value 0FFFCh is used before sending any frame. Unlike AIC A, when using the AIC B, the sampling frequency cannot be programmed as it is externally imposed by the FS signal.

Figure 2. Example of Code

```
* XF in ST1 drives both the AICs as follow:
*      CLRC      XF          ; Enables 320AC02C
*      SETC      XF          ; Enables 320AC46

MASK    .set      60h          ; MASK for both AICs

* Initialization of AICs
```



```

DINT                ; Disable interrupts during initialization
SST      #1,STATUS   ; Status register ST1 provides the
BIT      STATUS,11   ; value of bit XF in order to branch
BCND     AIC02,NTC    ; at the corresponding routine.
AIC46    SPLK      #0FFF8h,MASK ; MASK value for AIC 46 (13 bits)
B        RESTORE

*****
* DESCRIPTION: This routine initializes the TLC320AC02C for a 13.88 *
* kHz sample rate with a gain setting of 1, a master clock = 10 MHz *
* and a shift clock frequency SCF = 250 kHz. *
*****

      .def      AIC02
AICCFG .set      $
      .word     0003h      ; Ask for secondary communication
      .word     0114h      ; Reg A = 20
      .word     0003h      ; Ask for secondary communication
      .word     2100h      ; Read A reg = ?
      .word     0003h      ; Ask for secondary communication
      .word     2200h      ; Read B reg = ?
      .word     0003h      ; Ask for secondary communication
CFGEND .word     0000h      ; No-Op waiting for answer
AIC02  .set      $
      SPLK      #0FFFCh,MASK ; MASK value for AIC 02 (14 bits)
      MAR      *,AR1        ; Load arp
      LAR      AR1,#0300h    ; Point to FIFO (@0300h is an example)
      LACC     #AICCFG      ; Load configuration table start address
      RPT      #7           ; Move 8 configuration words to end of
      TBLR     *+           ; FIFO so it will be send first to AIC.
      SPLK     #0308h,ARCR   ; Load end of table
      SPLK     #0300h,AR1    ; and beginning of table.
                               ; Sequence of emission and reception
TXWAIT BIT S      PC,4       ; Wait for transmit ready
BCND    TXWAIT,NTC ; until xrdy goes low.
LACC    *0+       ; Read next control word
SACL    DXR       ; and send it to DXR.
RCWAIT  BIT      SPC,5       ; Wait for receive ready
BCND    RCWAIT,NTC ; until rrdy goes low.
LACL    DRR       ; Get answer word from DRR
SACL    *0-       ; and store it to check answers.
MAR     *+        ; Go to next control word
CMPR    0         ; Check for end of table, else loops
BCND    TXWAIT,NTC ; back to a new Transmit/Receive
                               ; sequence.
                               ; End of AIC-02 initialization

RESTORE:
      CLRC      INTM        ; Enables Interrupts
      SPLK      #0030h,IMR   ; Enables RINT and XINT
      B        MAIN        ; Check which part of table was sent
```