

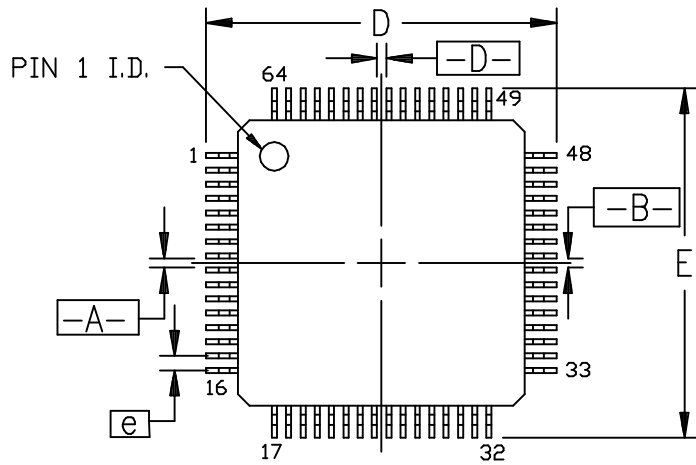


# TOP VIEW

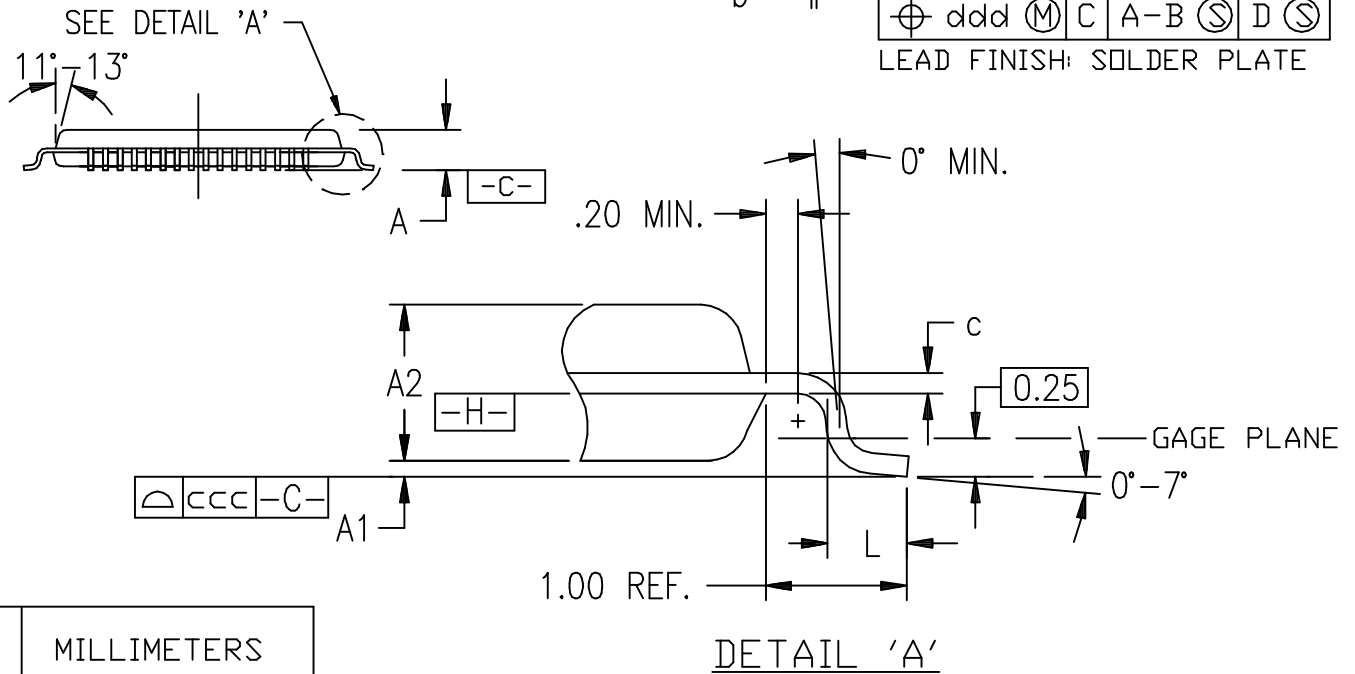

# BOTTOM VIEW

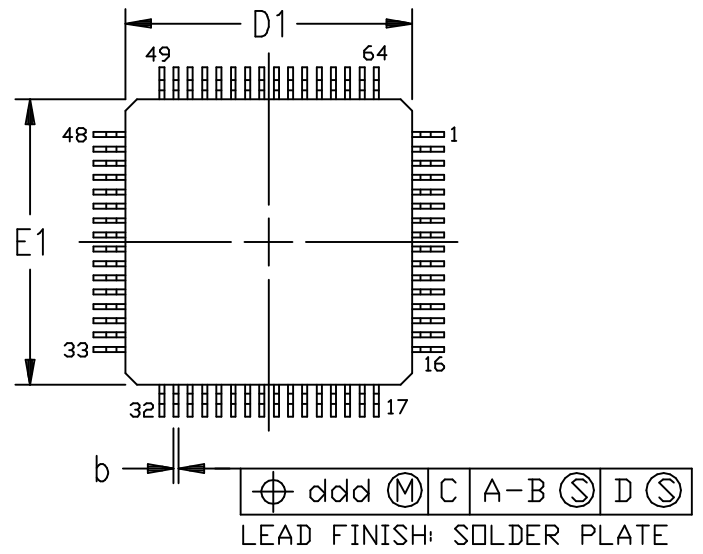

SYMBOL	MILLIMETERS		
	MIN.	NOM.	MAX.
A	$\sim$	$\sim$	1.20
A <sub>1</sub>	0.05	0.10	0.15
A <sub>2</sub>	0.95	1.00	1.05
D/E	12.00 BSC.		
D <sub>1</sub> /E <sub>1</sub>	10.00 BSC.		
b	0.17	0.22	0.27
c	0.09	$\sim$	0.20
e	0.50 BSC.		
L	0.45	0.60	0.75
ccc	$\sim$	$\sim$	0.08
ddd	$\sim$	$\sim$	0.08

## NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1982.
2. DIMENSIONS "D1" AND "E1" DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION IS 0.25mm PER SIDE.
3. THE TOP OF PACKAGE MAY BE SMALLER THAN THE BOTTOM OF PACKAGE BY 0.15mm.
4. THIS OUTLINE CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MS-026-ACD

## 64-PIN PLASTIC VQFP (VQ64)